


Nordstar LED-Streifen Type 3,9W/Meter

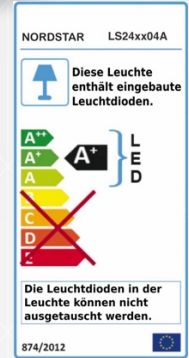

Artikel	LS24gw04A	LS24ww04A	LS24nw04A	LS24cw04A
Farbtemperatur	2400K ±5%	3000K ±5%	4000K ±5%	6000K ±5%
Lichtstrom/m	ca.430lm/m	ca.460lm/m	ca.490lm/m	ca.510lm/m
Lichtfarbe.	golden-weiß	warm-weiß	neutral-weiß	kalt-weiß
Chip Type	2835SMD	2835SMD	2835SMD	2835SMD
Chip Hersteller	Epistar	Epistar	Epistar	Epistar
CRI	>80	>80	>80	>80
LED's pro Rolle	400	400	400	400
LED's pro Segment	8	8	8	8
Pitch.	12,5mm	12,5mm	12,5mm	12,5mm
Abmessung BxHxL	10x2x5000mm	10x2x5000mm	10x2x5000mm	10x2x5000mm
Betriebsspannung	24VDC	24VDC	24VDC	24VDC
Betriebsstrom	0,7A	0,7A	0,7A	0,7A
Leistung pro Meter	3,9W	3,9W	3,9W	3,9W
Energieeffizienz	A+	A+	A+	A+
Abstrahlwinkel	120°	120°	120°	120°
Anzahl der Segmente	50	50	50	50
Segmentlänge	100mm	100mm	100mm	100mm
Schutzklasse	IP20	IP20	IP20	IP20
Energieverbrauch	18kw/1000h	18kw/1000h	18kw/1000h	18kw/1000h
Dimmbar	Ja	Ja	Ja	Ja
Dimmart	PWM	PWM	PWM	PWM
Aufwärmzeit	< 1 sek.	< 1 sek.	< 1 sek.	< 1 sek.
Umgebungstemperatur (Ta)	5>40°C	5>40°C	5>40°C	5>40°C
Arbeitstemperatur	55°C	55°C	55°C	55°C
Lebensdauer	40000 Std.	40000 Std.	40000 Std.	40000 Std.
Schaltzyklen max.	30000	30000	30000	30000

Stand 07.11.2018

Technische Änderungen und Irrtümer Vorbehalten



NORDSTAR U.G.

Hans-Schlehahn-Str. 10 51379 Leverkusen

0214 50061660 0214 50061661

REGISTER NR.: HRB 93907 | UST-IDNR.: DE317919580 | WEEE NR.: DE 18585574