


Nordstar LED-Streifen Type 10W/Meter

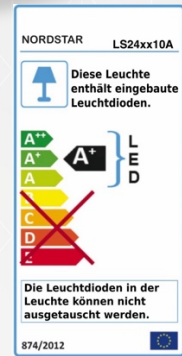

Artikel	LS24gw10B	LS24ww10B	LS24nw10B	LS24cw10B
Farbtemperatur	2400K ±5%	3000K ±5%	4000K ±5%	6000K ±5%
Lichtstrom/m	ca.1160lm/m	ca.1250lm/m	ca.1400lm/m	ca.1450lm/m
Lichtfarbe.	golden-weiß	warm-weiß	neutral-weiß	kalt-weiß
Chip Type	2835SMD	2835SMD	2835SMD	2835SMD
Chip Hersteller	Epistar	Epistar	Epistar	Epistar
CRI	>90	>90	>90	>90
LED's pro Rolle	640	640	640	640
LED's pro Segment	8	8	8	8
Pitch.	7,81mm	7,81mm	7,81mm	7,81mm
Abmessung BxHxL	10x2x5000mm	10x2x5000mm	10x2x5000mm	10x2x5000mm
Betriebsspannung	24VDC	24VDC	24VDC	24VDC
Betriebsstrom	1,8A	1,8A	1,8A	1,8A
Leistung pro Meter	10W	10W	10W	10W
Energieeffizienz	A+	A+	A+	A+
Abstrahlwinkel	120°	120°	120°	120°
Anzahl der Segmente	80	80	80	80
Segmentlänge	62,5mm	62,5mm	62,5mm	62,5mm
Schutzklasse	IP20	IP20	IP20	IP20
Energieverbrauch	44kw/1000h	44kw/1000h	44kw/1000h	44kw/1000h
Dimmbar	Ja	Ja	Ja	Ja
Dimmart	PWM	PWM	PWM	PWM
Aufwärmzeit	< 1 sek.	< 1 sek.	< 1 sek.	< 1 sek.
Umgebungstemperatur (Ta)	5>40°C	5>40°C	5>40°C	5>40°C
Arbeitstemperatur	55°C	55°C	55°C	55°C
Lebensdauer	40000 Std.	40000 Std.	40000 Std.	40000 Std.
Schaltzyklen max.	30000	30000	30000	30000

Stand 07.11.2018

Technische Änderungen und Irrtümer Vorbehalten



NORDSTAR U.G.

📍 Hans-Schlehahn-Str. 10 51379 Leverkusen

☎ 0214 50061660 📠 0214 50061661

REGISTER NR.: HRB 93907 | UST-IDNR.: DE317919580 | WEEE NR.: DE 18585574